1





# XV307

Multifunction Expansion Board

#### Introduction \_

The XV307 is a multifunction expansion board that includes 2 Analog Output channels, 4 Digital Input channels and 4 Form A Relay Output channels. The Analog Output channels are 12- bit at +/-5 V, +/-10 V, 0  $\sim$  +20 mA or +4  $\sim$  +20 mA, and voltage and current outputs are jumper selectable. The XV307 also provides options for configuring power-on values for the Analog Output and Digital Output. 4 kV ESD protection and 2000 VDC intra-module isolation are also provided to enhance noise immunity capabilities in industrial environments.

#### System Specifications —

Communication				
Interface	RS-232/TTL			
Format	N, 8, 1			
Baud Rate	115200 bps			
Protocol	Modbus/RTU			
Isolation				
Intra-module Isolation, Field-to-Logic	2000 VDC			
EMS Protection				
ESD (IEC 61000-4-2)	±4 kV Contact for each Terminal			
	±8 kV Air For Random Terminal			
Power				
Power from Terminal Block	5 VDC			
Consumption	1.6 W Max.			
Mechanical				
Dimensions (L x W x H)	82 mm x 59 mm x 13 mm			
Environment				
Operating Temperature	-25 ~ +75°C			
Storage Temperature	-30 ∼ +80°C			
Humidity	10 ~ 90% RH, Non-condensing			

### **■** Features

- Multifunction (2 AO, 4 DI, 4 Relay)
- Individual Channel Configuration for Analog Output
- Jumper Selectable Voltage or Current Output
- Open Wire Detection for Current Output
- Configurable Power-on Value Settings
- 70 VDC Overvoltage Protection for Digital Input











## I/O Specifications

Analog					
Analog			2		
Channels	5		2		
Туре			0 V $\sim$ +5 V, ±5 V, 0 V $\sim$ +10 V, ±10 V, 0 mA $\sim$ +20 mA, +4 mA $\sim$ +20 mA (Jumper Selectable)		
Resolution	Resolution		12-bit		
Accuracy			±0.1%		
Voltage (	Voltage Ouput Capability		10 V @ 20 mA		
Current Load Resistance		tance	500 Ω		
Power-on Value			Yes		
Digital Input/Counter					
Input Channels			4		
Time		Dry Contact	-		
Туре		Wet Contact	Sink/Source		
ON Valta	an Lovel	Dry Contact	-		
ON Volta	ge Levei	Wet Contact	+3.5 ~ +50 VDC		
OFF Valt	a a Laval	Dry Contact	-		
OFF VOIL	age Level	Wet Contact	+1 VDC Max.		
Input Impedance			10 KΩ, 0.5 W		
Channels		ls	4		
Counters	Max. Count		32-bit (0 ~ 4, 294, 967, 285)		
Counters	Max. Input Frequency		50 Hz		
	Min. Pulse Width		10 ms		
Overvolta	Overvoltage Protection		70 VDC		
Relay Output					
Channels			4		
Туре			Power Relay		
	Contact Rating		6 A @ 35 VDC 6 A @ 240 VAC		
	Min. Contact Load		100 mA @ ≧ 12 V		
Form A	Contact Material		Silver Cadmium Alloy		
Relay	Operate Time		5 ms (typical)		
	Release Time		1 ms (typical)		
	Mechanical Endurance		30 x 10 <sup>6</sup> ops.		
	Electrical Endurance		1 x 10 <sup>5</sup> ops.		
Power-or	Power-on Value		Yes		


## Pin Assignments -

# ■ Internal I/O Structure \_\_



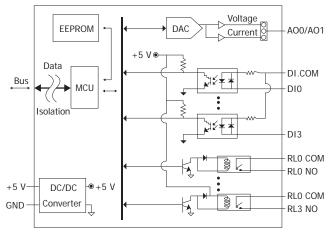

## **■** Wire Connections -

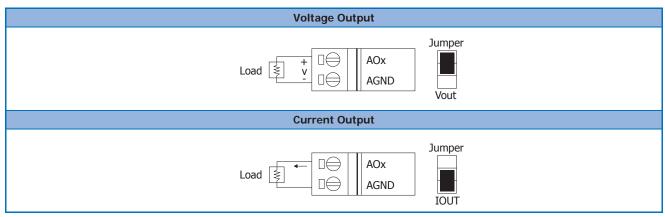

Digital Input/Counter	Readback as 1	Readback as 0
	+3.5 ~ +50 VDC	+1 VDC Max.
Wet Contact (Sink)	DIX 10 KΩ  To other channels	DIX 10 KΩ  +-  To other channels
	+3.5 ~ +50 VDC	+1 VDC Max.
Wet Contact (Source)	C DIX 10 KΩ  - +  To other  DI.COM  - the channels	DIX 10 KΩ  - + To other channels
Power Relay	Readback as 1	Readback as 0
Relay Output	RLx COM Relay Closed  AC/DC To other RLx NO Relay Closed	RLx COM Relay Open AC/DC  IOAD To other channels

### Ordering Information -

XV307 CR

Multifunction Expansion Board